



Paddlewheel Flow Meter  
FP-AS Series  
FP-AS310



With Patented

**AxleSense**

Technology

# FP-AS310

Patented AxleSense Paddlewheel Flow Meter



Premium pipe fitting

Flexible Device installment:  
Vertical/Horizontal

Highly Visible  
Situational Backlight

Modular 3 piece design : Easier maintenance

Axlesense technology:  
High accuracy measurement

Selectable Flow Direction Detection

# Fluid Measurement Made Simple with Paddle Wheel Flowmeters


For industries that rely on precise fluid measurement such as water management, chemical processing, and agriculture, paddle wheel flowmeters have been a trusted solution for decades. Known for their practicality and reliability, paddle wheel deliver accurate results without the complexity or high costs of advanced systems.

## Challenges of Traditional Designs

While effective, traditional paddle wheel flowmeters face issues like paddle wear, installation sensitivities, and limited detection capabilities, which can affect long-term reliability, accuracy and efficiency.

## Working Principle

A paddle wheel inside the pipe spins as fluid flows past it. Sensors track the rotation speed of the paddle wheel and translate this motion into accurate readings. It's a practical and proven method for flow measurement.

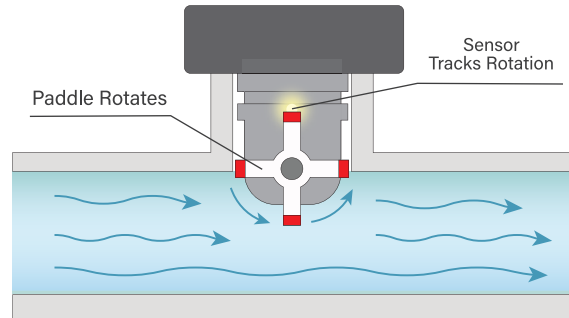


# Reinventing Paddle Wheel Flowmeters: Precision Perfected with LORRIC's AxleSense




AxleSense technology revolutionizes signal measurement, significantly increasing signal output frequency for more accurate flow measurement.

## Others vs LORRIC

Conventional paddle wheels have 4 blades ; signals are generated only when magnets on the blades pass the sensor.

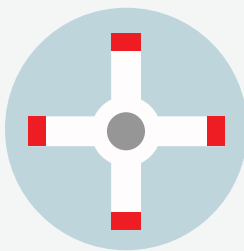


generate one signal per blade pass (90°)

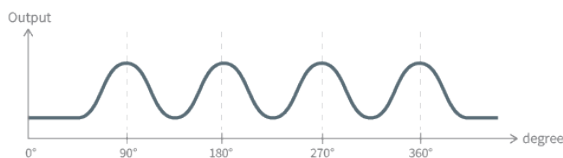


**Standard Four-Blade Flow Meters Output**  
One Signal per 90 Degrees Rotation  
Generally 1 to 2 Output per Revolution (max 4)

AxleSense Technology with magnet on the axle; signals are generated by measuring magnetic axle rotation.

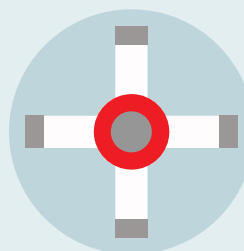


generate one signal every 3°

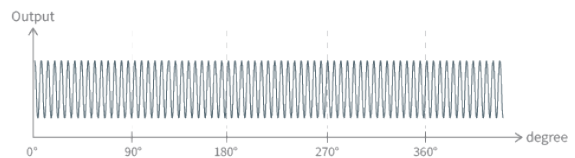

**LORRIC AxleSense Flow Meters Output**  
One Signal Every 3 Degrees  
120 Outputs per Revolution

# Selectable Flow Direction Detection

Accurately measure flow direction with a selectable positive flow display

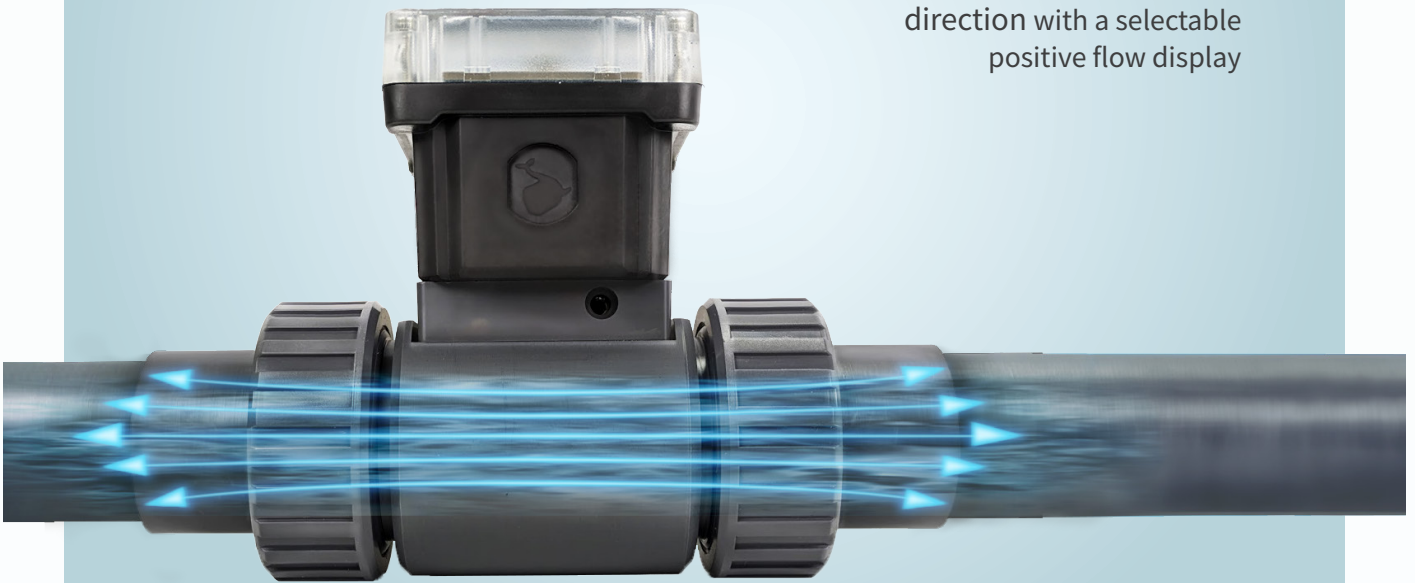


AxleSense's patented technology enables bidirectional flow detection by measuring paddlewheel rotation direction, overcoming the limitations of traditional paddlewheel flowmeter that use Hall effect sensors, which can detect rotation but not direction.

In the FP-AS310, this innovative feature provides essential directional flow data with a selectable positive flow display, enhancing measurement accuracy and operational control.




Traditional Paddle Wheel Flowmeter

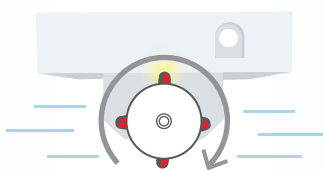

Detects flow by sensing the magnet on the paddles, without recognizing flow direction.


LORRIC's AxleSense

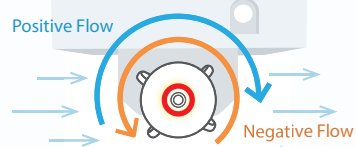


Detects both flow and direction by sensing the magnet rotation on the axle

## Wider Detection Range

High accuracy measurement across low and high flow rates, boosting efficiency and minimizing errors in diverse applications.

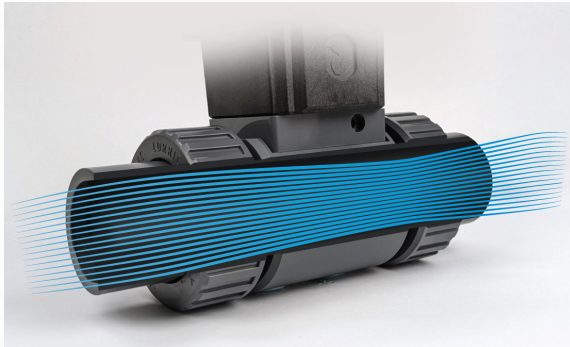

High flow rate

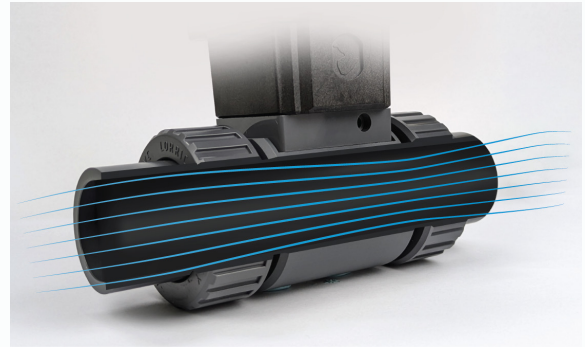

Low flow rate

## Double the Range, Outperforming Standard Flowmeters




Traditional paddlewheel flow meters often have significant errors or cannot detect flow at low flow rates in the fluid inside the pipe. Upgrade your flow measurement capabilities with LORRIC's AxleSense technology! No more worries about inaccurate readings or missed low flow rates. Our advanced innovation ensures enhanced accuracy and a broader measurement range, spanning from 0.15 m/s to 10 m/s- double that of competing brands.



\* The FP-AS310 covers a measurement range of 0.3 m/s to 10 m/s. For measurements starting from 0.15 m/s, select the FP-AS510.

# Real Time Smart Paddle Detection


Unexpected flow disruptions can impact your entire operation, but LORRIC's Real-Time Smart Detection keeps you one step ahead. By continuously monitoring the paddlewheel's condition, including magnet strength, wear, and damage, it ensures accurate readings and sends immediate alerts when issues arise. This minimizes downtime, prevents costly errors, and boosts operational efficiency. Ideal for critical industries, it seamlessly integrates with factory systems in Industry 4.0 environments, enabling smarter and more efficient management.

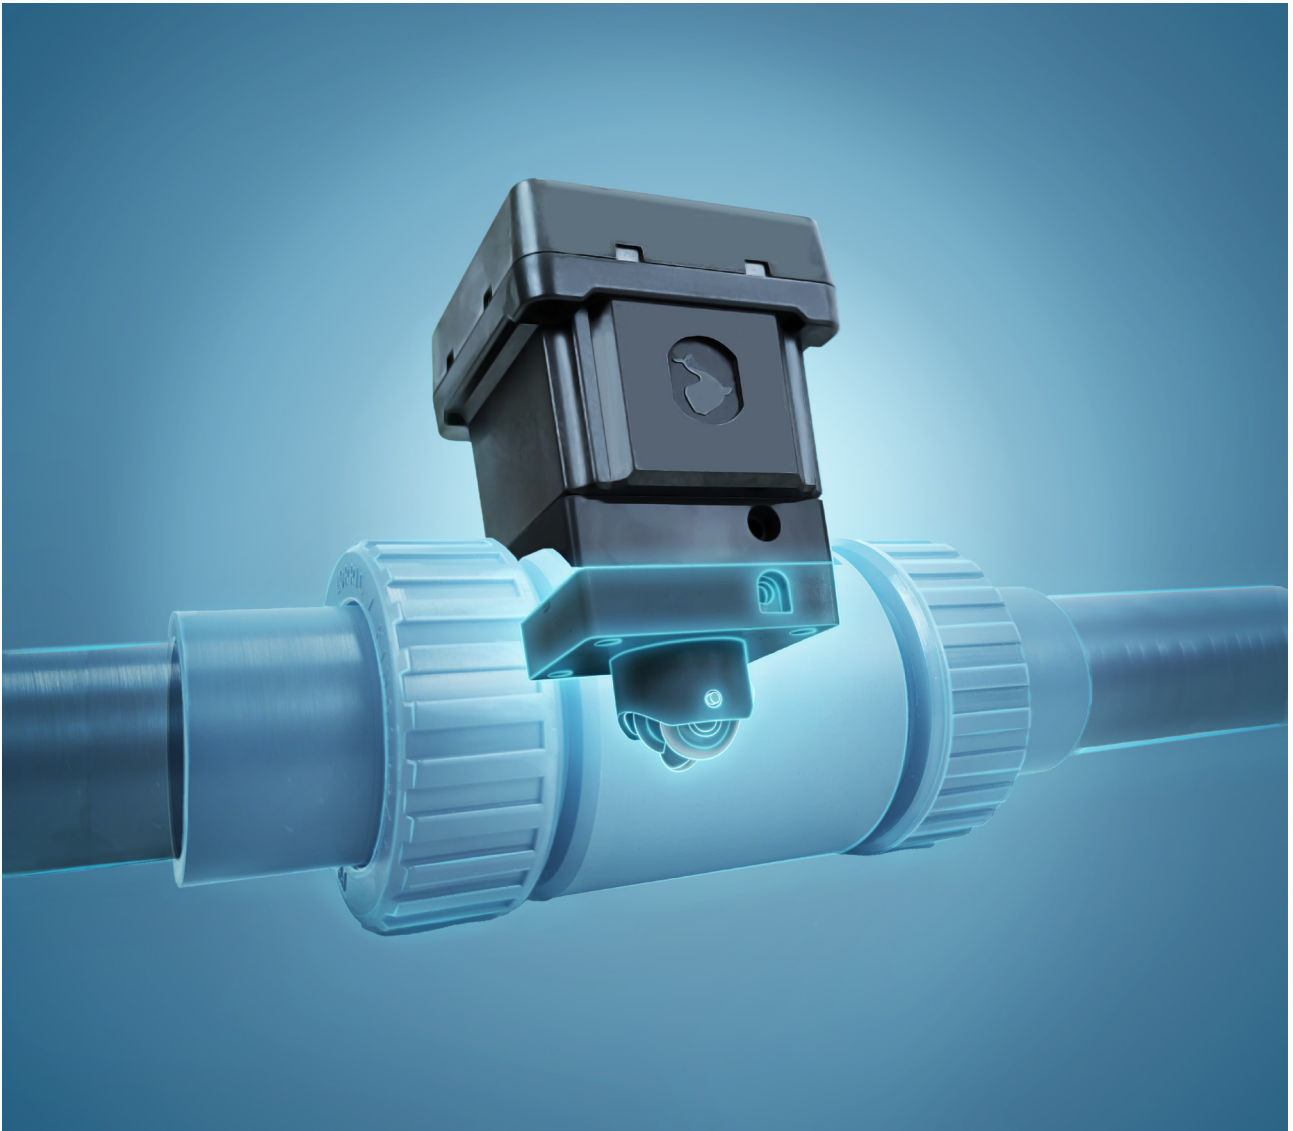

More details on  
AxleSense online Manual:  
Parameter List > H System  
> H05

\*Usage Note: The abnormality warning function helps on-site staff quickly identify equipment issues. However, it may be affected by environmental factors, nearby equipment, or magnetic interference, reducing its effectiveness. Do not rely on this feature as your sole source for critical or safety-related alerts. For detailed troubleshooting or further assistance, please contact LORRIC for additional support

# Instant Visual Feedback

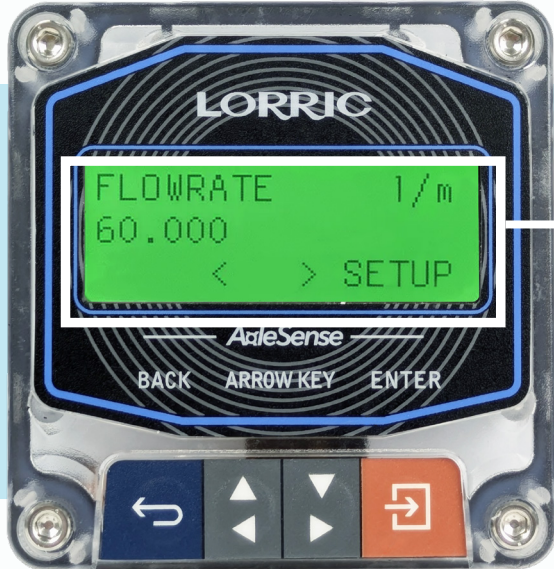

LCD screen for easy traffic and equipment status monitoring

## LCD

LCD screen backlight with three-color warning light signal for visual monitoring of flow meter's normal and abnormal conditions.


**GREEN**




**RED**




**ORANGE**

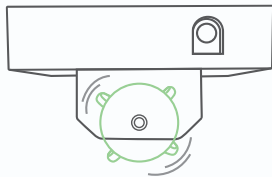

Normal Operation

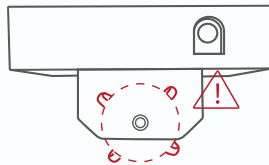


Error Detected



Setting Mode

# Flexible Installation Options

Designed for both vertical and horizontal mounting, making installation simple and versatile.

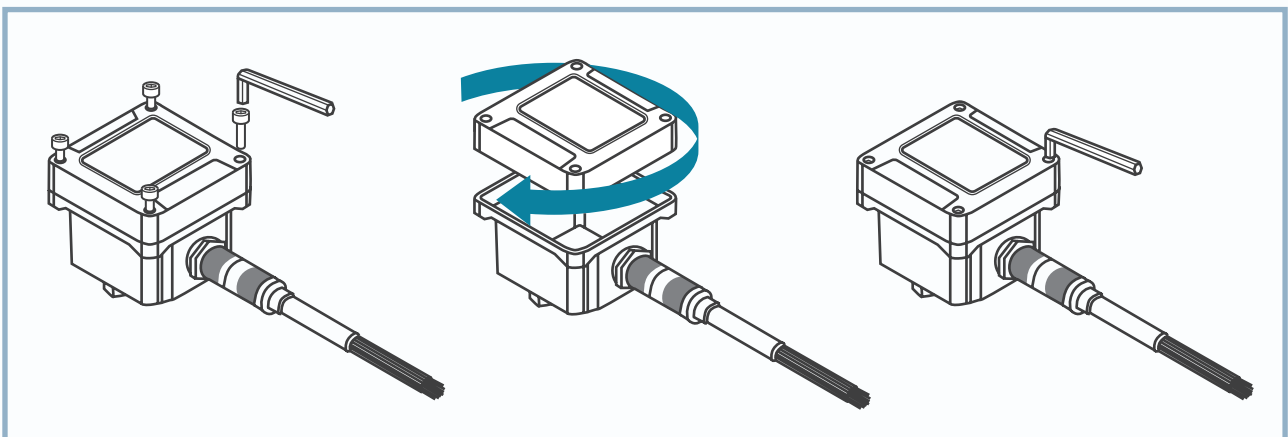

1. Unscrew the display panel to release it.

2. Rotate the screen to your desired orientation

3. Reattach and tighten the screws securely to lock the screen in place



## Easy Maintenance with **LORRIC's Modular 3-Piece Design**

LORRIC's paddlewheel flowmeter features an innovative 3-piece design that simplifies maintenance and reduces costs. The system consists of three main components: the main unit, paddlewheel base, and pipe fitting. This modular design means you don't need to replace the entire system when a part wears out—just swap the affected component, saving both time and money on re-piping.




## Universal Compatibility for FP-AS Series



LORRIC offers two versatile main unit models, FP-AS510 and FP-AS310, which are compatible with the same paddlewheel base and pipe fitting. This compatibility ensures easy maintenance and flexibility, helping you optimize your operations without worrying about costly part replacements.

With LORRIC, enjoy seamless maintenance, minimized downtime, and cost-efficient flow monitoring for the long haul, all in one.


# Why Pipe Fitting Quality Matters in Flow Measurement

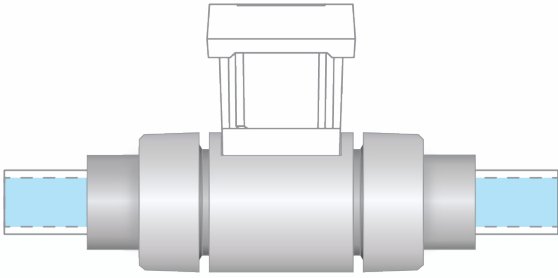

Pipe fittings are more than just connectors — they play a critical role in maintaining accurate flow measurement. Poorly manufactured fittings, especially those with uneven surfaces or imperfections, can disrupt the fluid flow, leading to turbulence, pressure drops, and inaccurate readings. Over time, these issues can compromise system efficiency and increase maintenance costs.

## LORRIC's Premium Pipe Fittings: Engineered for Precision and Durability


### Other Brands

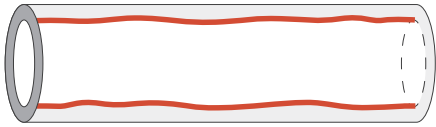

Wavy, inconsistent pipe fitting wall surface

Traditional plastic injection molding methods often produce fittings with uneven surfaces and inconsistent pipe walls, leading to unstable fluid flow and inaccurate readings. These issues, such as shrinkage, flash, and weak welds, can reduce the lifespan of fittings and compromise performance.

### LORRIC

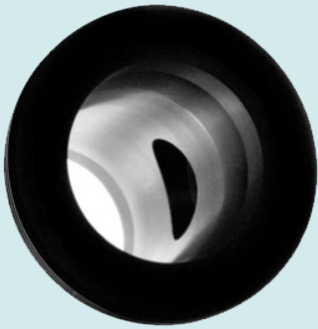

Flawless, smooth inner pipe fitting wall surface

At LORRIC, we've redefined pipe fitting quality with our premium manufacturing process. Instead of relying on conventional plastic injection molding, our fittings are crafted from extruded rod material. This method ensures a flawless, smooth inner surface that promotes stable fluid flow and enhances measurement precision.

When you choose LORRIC, you're not just selecting a fitting — you're investing in better performance, reduced downtime, and peace of mind. Our commitment to precision delivers the quality your system deserves.

## Versatile Pipe Fittings for Every Industry: Choose the Right Material for Your Application

LORRIC's paddle wheel flowmeters are designed to provide flexibility and durability with pipe fittings made from a variety of materials, each carefully selected to meet the specific needs of different industries. Whether you're handling water, chemicals, or high-pressure systems, we have the right solution for you.

**PPH (Polypropylene Homopolymer)**

Suited for corrosive chemicals and industrial fluids.  
Temperature range: 0°C to 90°C.

**UPVC (Unplasticized Polyvinyl Chloride)**

Ideal for water, mild chemicals, and non-corrosive fluids.  
Temperature range: 0°C to 50°C.

**PVDF (Polyvinylidene Fluoride)**

Perfect for aggressive chemicals, acids, and high-purity applications.  
Temperature range: -20°C to 140°C.

**Stainless Steel**

Ideal for high-pressure systems, hot fluids, and abrasive liquids.  
Temperature range: -20°C to 140°C.

# Specifications

|  |  |
|--|--|
| Installation method                        | in-line (Pipe segment)   |
| T-connector adapter                        | UPVC/PPH / PVDF (Made to order) / 316L Stainless Steel   |
| Paddle material                            | PVDF or PPH with embedded magnet + ceramic bearing and shaft   |
| Applicable fluid                           | Various liquids, impurities (<1%)  |
| Applicable fluid maximum dynamic viscosity | 300cSt *   |
| Fluid in pipes temperature **              | UPVC 0-45°C (32~122°F) / PPH : 0-80°C/PVDF: 0-100°C / ss316L : 0-100°C   |
| Device working environment temperature     | -10~60°C (14~140°F)  |
| Flow velocity range                        | ± 0.3~10m/s ***  |
| Language                                   | English, Chinese   |
| Unit                                       | Metric: Liter, cubic meters / Time: minute, hour / Imperial: foot, Cubic foot, US gallon   |
| Display                                    | 16x3 3-Color Backlight LCD display   |
| Response time                              | 1s   |
| Display resolution                         | Maximum resolution 0.01 (finest)   |
| Measurement accuracy                       | +2.5% RD ****  |
| Linearity                                  | ±0.5% FS (>0.3m/s)   |
| Reproducibility                            | ± 0.4 %  |
| Power supply                               | DC 24V 100mA   |
| Power I/O connector                        | Quick Release 6-pin connector  |
| Input/Output                               | [FP-AS310A] Analog output with self-powered 10-bit 4-20mA, Two-wire optocoupler switch signal (with 2 meters long signal line)<br>[FP-AS310R] Modbus RTU RS485 |
| Consumption current                        | <200mA@12V when starting up and working stably (not included in the communication current)   |
| Protection circuit                         | Power reverse connection protection, Power surge protection  |
| Waterproof level                           | IP66 *****   |
| Transient data                             | Instantaneous flow volume  |
| Cumulative data                            | Cumulative positive flow   |
| Display digits                             | LED 5 Digits (4 digits when negative value) / LCD 10 Digits (Not including sign and decimal point)   |
| Operation button                           | 4 Key touch buttons  |
| Calendar function battery                  | 2 meters long signal line  |

\*This machine is calibrated with normal temperature water before leaving the factory. Fluids with different viscosity than water will cause inaccurate calibration values and may also change the minimum and maximum flow rates.




\*\* The working temperature of each material is for reference only. Please select based on design experience for actual selection.

\*\*\* Minimum flow rate values vary slightly due to flow field factors of individual models.


\*\*\*\* The measurement accuracy is based on the statistical results of the laboratory tests with room temperature 25 degrees C and clean water. Errors may occur due to the customer's usage environment.

\*\*\*\*\* The IP of IP66 is the abbreviation of Ingress Protection. The IP level is the protection level of the electrical equipment shell against foreign matter intrusion. The format of the IP level is IPXX, where XX is two Arabic numerals, and the first marked number indicates contact protection, and foreign object protection level, used to indicate dust resistance, the second marked number indicates the waterproof protection level, the larger the number, the better the protection level. The first 6 of IP66 means: completely prevent dust from entering; the second 6 means: no harm caused by high-pressure water splashing.

## Explore FP-AS310 Configurations: Size, Flowrate, and Pipe Fitting Options



|   | Applicable Diameter | Flow Range       | Fitting Material Options  |
|---|---------------------|------------------|---|
| <b>FP-P015</b><br>   | DN 15 (mm)          | 3.6-120.6 LPM    | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 1/2" NPS            | 0.95-28.4 gpm    |   |
| <b>FP-P020</b><br>   | DN 20 (mm)          | 5.7-188.5 LPM    | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 3/4" NPS            | 1.5-49.86 gpm    |   |
| <b>FP-P025</b><br>  | DN 25 (mm)          | 8.8-294.5 LPM    | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 1" NPS              | 2.32-80.81 gpm   |   |
| <b>FP-P032</b><br> | DN 32 (mm)          | 13.6-452.9 LPM   | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 1¼" NPS             | 3.59-139.86 gpm  |   |
| <b>FP-P040</b><br> | DN 40 (mm)          | 22.6-754.0 LPM   | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 1½" NPS             | 5.97-190.36 gpm  |   |
| <b>FP-P050</b><br> | DN 50 (mm)          | 36.8-1225.7 LPM  | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> <li>• Stainless Steel (316L)</li> </ul> |
|   | 2" NPS              | 9.72-313.77 gpm  |   |
| <b>FP-P065</b><br> | DN 65 (mm)          | 65.4-2179.0 LPM  | <ul style="list-style-type: none"> <li>• UPVC</li> <li>• PPH</li> <li>• PVDF</li> </ul>                                   |
|   | 2½" NPS             | 17.27-526.29 gpm |   |

# Size | UPVC | PPH | PVDF

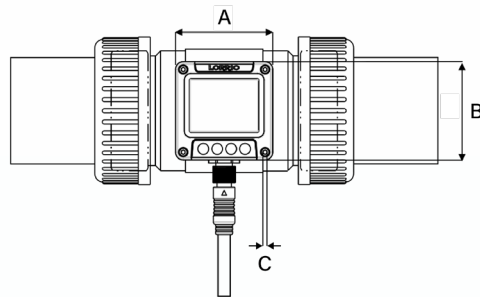


Unit: mm

| Device Size |    |     |
|-------------|----|-----|
| A           | B  | C   |
| 63          | 63 | 2.5 |

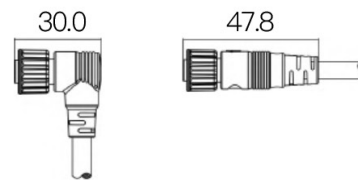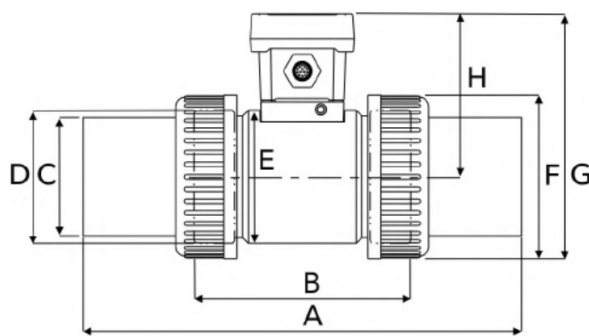

Unit: mm

| Plastic pipe – union diameter size |       |       |      |      |      |      |       |      |
|------------------------------------|-------|-------|------|------|------|------|-------|------|
|                                    | A     | B     | C    | D    | E    | F    | G     | H    |
| 1/2"                               | 164   | 100   | 27.6 | 36   | 62.3 | 46.2 | 115.7 | 86.2 |
| 3/4"                               | 168   | 100   | 32.6 | 41.9 | 62.3 | 50.5 | 115.7 | 85.7 |
| 1"                                 | 168   | 100   | 40.6 | 50   | 62.3 | 60   | 115.7 | 85.7 |
| 1 1/4"                             | 210   | 114   | 50.2 | 59.6 | 65   | 75.6 | 127   | 89.2 |
| 1 1/2"                             | 218   | 120   | 56   | 65.7 | 70   | 83   | 134   | 92.5 |
| 2"                                 | 269.5 | 133.3 | 72   | 81   | 81   | 99.7 | 148.8 | 99   |

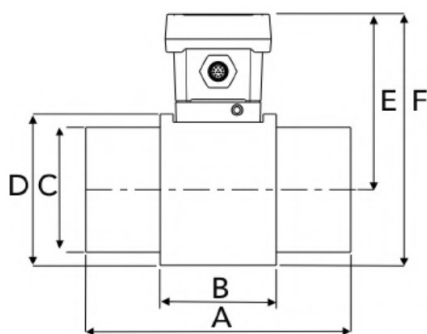


Unit: mm


| Plastic pipe – spigot pipe diameter size |     |    |    |    |       |       |
|--|-----|----|----|----|-------|-------|
|  | A   | B  | C  | D  | E     | F     |
| 2 1/2"                                   | 160 | 70 | 76 | 92 | 106.5 | 152.5 |

# Size | Stainless Steel

## Metal Female Thread

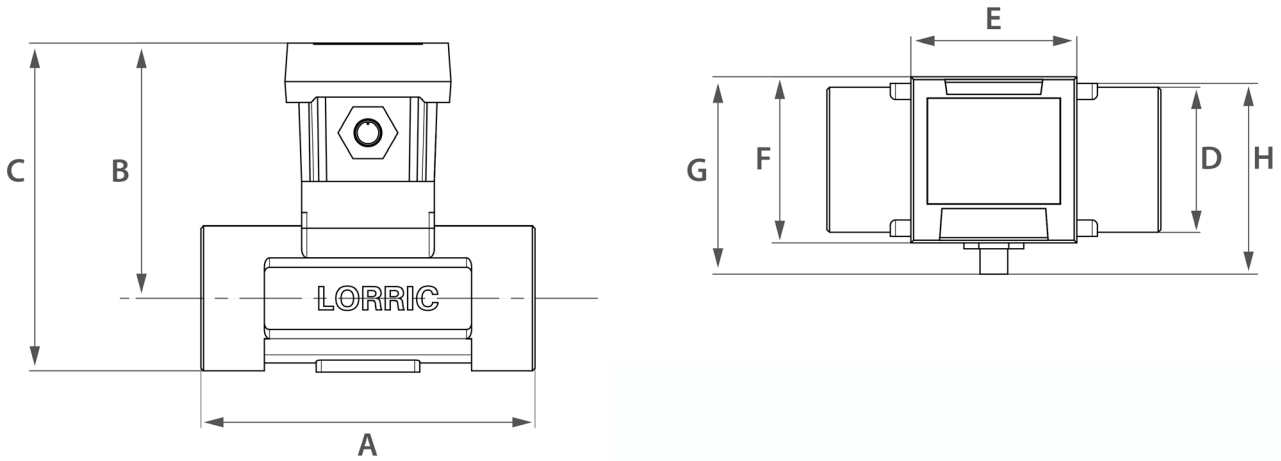


| Stainless steel - Female Thread |       |        |        |    |      |      |       |       |
|---------------------------------|-------|--------|--------|----|------|------|-------|-------|
|                                 | A     | B      | C      | D  | E    | F    | G     | H     |
| 1/2"                            | 120   | 89.37  | 103.4  | 27 | 64.1 | 64.1 | 64.1  | 76.15 |
| 3/4"                            | 120   | 89.5   | 106.91 | -  | 64.1 | 64.1 | 64.1  | 76.15 |
| 1"                              | 120   | 89.41  | 111.16 | 42 | 64.1 | 64.1 | -     | 76.15 |
| 1 1/4"                          | 119   | 95.2   | 120.7  | 51 | 64.1 | 64.1 | 51    | 76.15 |
| 1 1/2"                          | 129   | 98.55  | 126.55 | 56 | 64.1 | 64.1 | 56    | 76.15 |
| 2"                              | 148.5 | 104.98 | 137.98 | 65 | 64.1 | 64.1 | 76.15 | 78.12 |

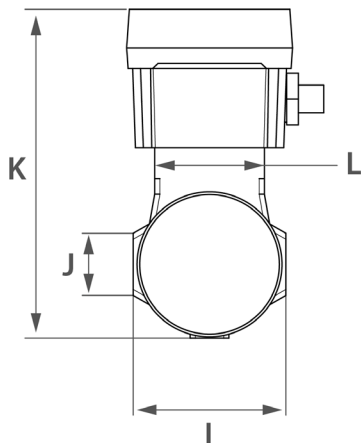

| Stainless steel - Female Thread |       |    |        |      |
|---------------------------------|-------|----|--------|------|
|                                 | I     | J  | K      | L    |
| 1/2"                            | 95.41 | -  | 95.41  | 42.4 |
| 3/4"                            | 42.4  | -  | 106.91 | 42.4 |
| 1"                              | -     | -  | 111.16 | 42.4 |
| 1 1/4"                          | 54    | 20 | 121.2  | 42.4 |
| 1 1/2"                          | 59    | 24 | 127.05 | 42.4 |
| 2"                              | 68    | 30 | 137.98 | 42.4 |

# Size | Stainless Steel


## DN 25 1" Metal Male Thread

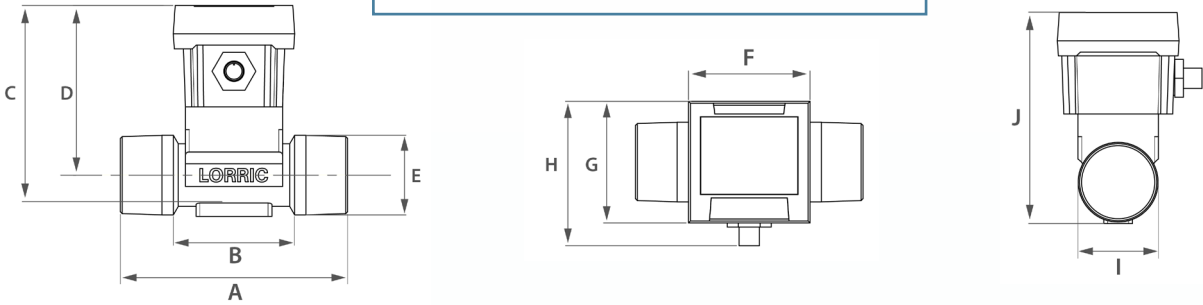

DN-25 (1") Stainless steel - Male Thread

|      | A   | B    | C      | D     | E  | F    | G    | H     | I    | J      |
|------|-----|------|--------|-------|----|------|------|-------|------|--------|
| 1/2" | 120 | 58.8 | 111.16 | 89.41 | 33 | 64.1 | 64.1 | 76.15 | 42.4 | 111.16 |


## DN 20 3/4" Metal Male Thread

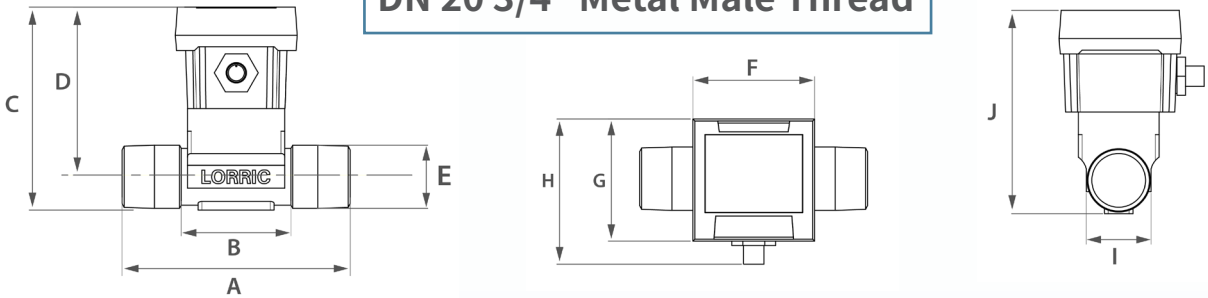

DN-20 (3/4") Stainless steel - Male Thread

|      | A   | B     | C      | D    | E  | F    | G    | H     | I    | J      |
|------|-----|-------|--------|------|----|------|------|-------|------|--------|
| 3/4" | 120 | 57.69 | 106.09 | 89.4 | 30 | 64.1 | 64.1 | 76.15 | 42.4 | 106.09 |

## DN 15 1/2" Metal Male Thread

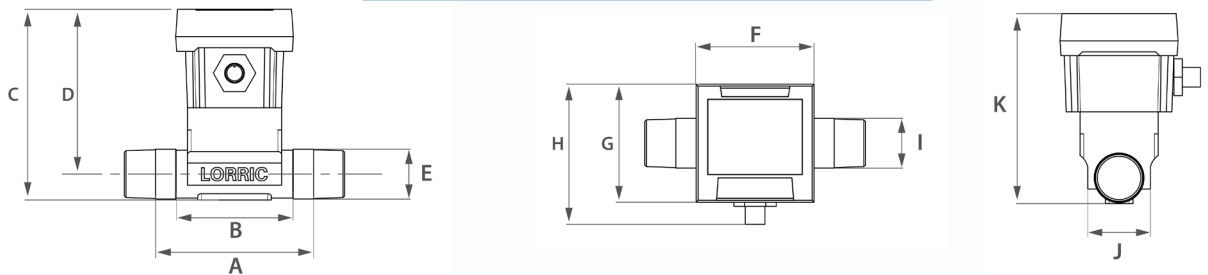

DN-15 (1/2") Stainless steel - Male Thread

|    | A   | B     | C      | D     | E  | F    | G    | H     | I  | J      |
|----|-----|-------|--------|-------|----|------|------|-------|----|--------|
| 1" | 120 | 63.42 | 103.41 | 89.41 | 26 | 64.1 | 64.1 | 76.15 | 34 | 103.41 |




# How to Order

The whole set of paddle wheel flowmeter contains: Device, Paddle set, T-connector.

1. Select the flowmeter device and cable connector ( Order code example: FP-AS310A(R) )
2. Choose the T-connector + paddle set based on size, materials, type and pipe specification (Example: FP-P050CUAV)
3. For ordering the whole set, combine both codes altogether (Order code example: FP-AS310A(R) + FP-P050CUAV)

**1** Please Choose: Device

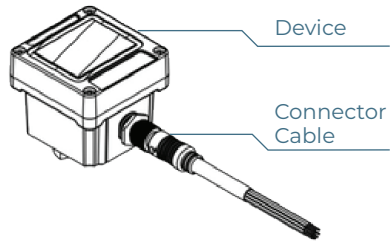

**2** Connector Cable




Device

Connector Cable

**Order Code Example:** FP-AS310A (R)

|                                    |                |                              |  |
|------------------------------------|----------------|------------------------------|--|
| <input type="checkbox"/> FP-AS310A | 4–20mA and NPN | <input type="checkbox"/> (S) | Straight   |
| <input type="checkbox"/> FP-AS310R | RS485          | <input type="checkbox"/> (R) | 90° angle  |

## Union Fitting

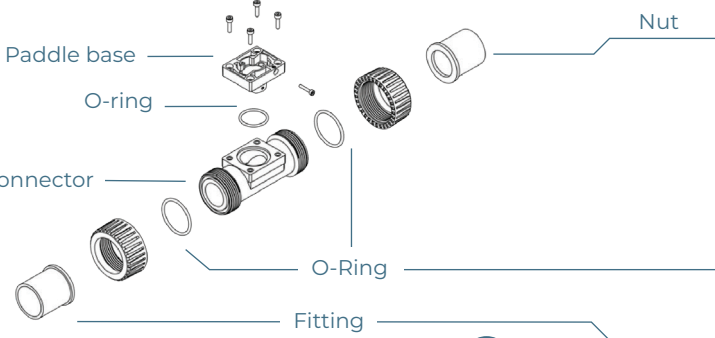

**3** Please Choose:

**T-connector**

Select pipe size:

**Fitting Spec**

Select fitting spec:

**5** **O-Ring Material**

Select material:

**Order Code Example:** FP-P050

C

U

A





V

**Code:**


|                                  |             |
|----------------------------------|-------------|
| <input type="checkbox"/> FP-P015 | 1/2" Pipe   |
| <input type="checkbox"/> FP-P020 | 3/4" Pipe   |
| <input type="checkbox"/> FP-P025 | 1" Pipe     |
| <input type="checkbox"/> FP-P032 | 1-1/4" Pipe |
| <input type="checkbox"/> FP-P040 | 1-1/2" Pipe |
| <input type="checkbox"/> FP-P050 | 2" Pipe     |

For 2-1/2" Pipe size, please refer to next page

**Code:**

|   |                        |
|---|------------------------|
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">C</span>   | U-PVC                  |
|  |                        |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">P</span>   | PPH                    |
|  |                        |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">F</span>   | PVDF                   |
|  |                        |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">S</span>   | Stainless Steel (316L) |
|  |                        |

**Code:**

|   |                 |
|---|-----------------|
| <input type="checkbox"/> U  | Union + fitting |
|  |                 |

For Spigot & Flange fitting, Please refer to next page

**Code:**

( For U-PVC T-connector ):

|   |                    |
|---|--------------------|
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">T</span> | Taiwan CNS         |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">A</span> | ANSI/ASTM          |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">N</span> | GB                 |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">J</span> | JIS                |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">E</span> | DIN                |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">F</span> | BSPT Female Thread |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">M</span> | BSPT Male Thread   |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">R</span> | NPT Female Thread  |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">Q</span> | NPT Male Thread    |

( For PPH / PVDF T-connector ):

|   |  |
|---|--|
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">6</span> | Insertion welding fitting (Default):<br>ISO 15494 (PPH)<br>ISO 10931 (PVDF)              |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">5</span> | Butt welding fitting (Made to order):<br>ISO 15494 SDR11 (PPH)<br>ISO 10931 SDR21 (PVDF) |

( For Stainless Steel T-connector ):


|   |                    |
|---|--------------------|
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">F</span> | BSPT Female Thread |
| <span style="background-color: #1a4a5d; color: white; padding: 2px 5px;">M</span> | BSPT Male Thread   |

**Code:**

|                            |       |
|----------------------------|-------|
| <input type="checkbox"/> E | EPDM  |
| <input type="checkbox"/> V | VITON |
| <input type="checkbox"/> A | FEPM  |

\* The common specifications are listed above, please contact our sales for delivery and inventory.




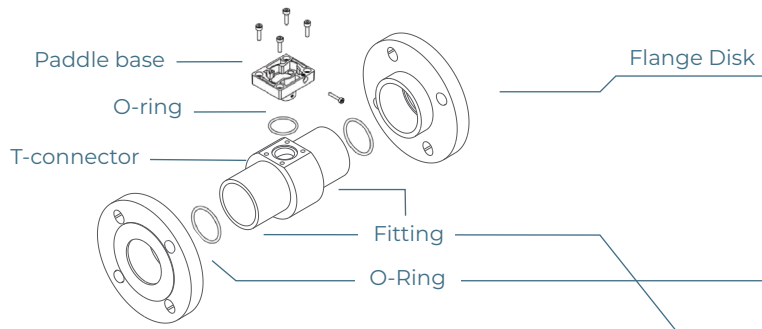
## Spigot Fitting



Please Choose:

|                   |                       |                                  |                      |                  |                        |
|-------------------|-----------------------|----------------------------------|----------------------|------------------|------------------------|
| <b>3</b>          | <b>T-connector</b>    | <b>4</b>                         | <b>Fitting Spec</b>  | <b>5</b>         | <b>O-Ring Material</b> |
| Select pipe size: | Select pipe material: | Select T-connector fitting type: | Select fitting spec: | Select material: |                        |

Order Code Example: **FP-P065**   **C**   **S**   **A**   **V**

|                                  |   |  |   |   |
|----------------------------------|---|--|---|---|
| Code:<br>■ FP-P065   2-1/2" Pipe | Code:<br>■ <b>C</b> U-PVC<br> | Code:<br>■ <b>S</b> Spigot fitting<br> | Code:<br>( For U-PVC T-connector ) :<br>■ <b>T</b> Taiwan CNS<br>■ <b>A</b> ANSI/ASTM<br>■ <b>N</b> GB<br>■ <b>J</b> JIS<br>■ <b>E</b> DIN  | Code:<br>■ <b>E</b> EPDM<br>■ <b>V</b> VITON<br>■ <b>A</b> FEPM |
|                                  | ■ <b>P</b> PPH<br>           |  | ( For PPH / PVDF T-connector ) :<br>■ <b>6</b> Insertion welding fitting (Default):<br>ISO 15494 (PPH)<br>ISO 10931 (PVDF)<br>■ <b>5</b> Butt welding fitting (Made to order):<br>ISO 15494 SDR11 (PPH)<br>ISO 10931 SDR21 (PVDF) |   |
|                                  | ■ <b>F</b> PVDF<br>          |  |   |   |


## Flange Fitting

(Available by custom order only)

Please Choose:

|                   |                       |                                  |                      |                  |                        |
|-------------------|-----------------------|----------------------------------|----------------------|------------------|------------------------|
| <b>3</b>          | <b>T-connector</b>    | <b>4</b>                         | <b>Fitting Spec</b>  | <b>5</b>         | <b>O-Ring Material</b> |
| Select pipe size: | Select pipe material: | Select T-connector fitting type: | Select fitting spec: | Select material: |                        |

Order Code Example: **FP-P050**   **C**   **F**   **K**   **V**

|   |                                     |   |                       |  |
|---|-------------------------------------|---|-----------------------|--|
| ■ FP-P050   2" Pipe<br>■ FP-P065   2-1/2" Pipe<br>Please contact our sales for other pipe sizes | ■ U-PVC<br>■ Stainless Steel (316L) | ■ <b>F</b>  | ■ <b>K</b> JIS 10K TS | ■ <b>E</b> EPDM<br>■ <b>V</b> VITON<br>■ <b>A</b> FEPM |
|---|-------------------------------------|---|-----------------------|--|

\* The common specifications are listed above, please contact our sales for delivery and inventory.

# LORRIC AxleSense Paddlewheel Flow Meter Series: AS510 vs. AS310

**FP-AS510**



**FP-AS310**



Complex conditions,  
require more features

## Suitable Scenarios

OEM customers,  
large-scale installations,  
price-sensitive applications



**Double screen design**  
LED 5 Digits LCD 10 Digits

## Screen Display



**Single screen design**  
LCD 10 Digits

Positive flow  
negative flow  
net flow volume

## Total Flow

Positive flow only

## One version

For Analog output 4-20mA,  
Modbus RTU RS485, 2-wire  
photoelectric switch signal  
(compatible with NPN/PNP)

## Model Types

## Two version

FP-AS310R for rs485  
FP-AS310A for 4-20mA and  
Switch Signal (NPN)

Flow speed 0.15~10m/s

## Measurement Range

Flow measurement  
above 0.3 m/s



**M12 8-pin**  
DC 12V to 36V 100mA

## Power Modes



**Quick-release 6-pin**  
DC24V 100mA

# Specification Comparison

|                                 | FP-AS510  | FP-AS310R/FP-AS310A  |
|---------------------------------|---|--|
| Suitable Scenarios              | Complex conditions, require more features   | OEM customers, large-scale installations, price-sensitive applications   |
| Device Material                 | PC + GF (glass fiber)   | PC + GF (glass fiber)  |
| Power Demand                    | DC 12V to 36V 100mA   | DC24V 100mA  |
| Fluid Temperature               | 0~50°C (32~122°F)   | 0~50°C (32~122°F)  |
| Working Environment Temperature | -10~60°C (14~140°F)   | -10~60°C (14~140°F)  |
| Models Types                    | One version for Analog output 16bit 4-20mA, Modbus RTU RS485, 2-wire photoelectric switch signal (compatible with NPN/PNP)                                  | Two versions<br>FP-AS310R for RS485, FP-AS310A for 4-20mA, 2-wire photoelectric switch signal (compatible with NPN/PNP)                  |
| 4-20mA Resolution               | 16-bit  | 10-bit   |
| Power I/O Connector             | M12 8-pin   | Quick-release 6-pin  |
| Data Accumulation Display       | Cumulative flow: positive flow, negative flow, and net flow volume. Includes a 14-day historical flow record with timestamps.(past 14 days daily totalizer) | Cumulative flow: Positive Flow (Display only positive flow, direction selectable)  |
| Transient Data                  | Instantaneous flow rate, instantaneous flow velocity  | Instantaneous flow rate  |
| Display Digits                  | LED 5 Digits<br>LCD Maximum 9 digits  | LCD Maximum 9 digits   |
| Calendar Function Battery       | CR2032 (For past 14 days totalizer only)  | No battery   |
| Bi-directional Flow Detection   | Yes, show both positive and negative flow   | No, flow direction can be changed but only positive will display   |
| Volume and Time unit            | Volume unit: <b>L, m3, US Gallon, Imperial Gallon, ft3.</b><br>Time Unit: <b>seconds, minutes, hours, days.</b>   | Flow Units: <b>m3, L, US gallons, ft3</b><br>Time Units: <b>minutes, hours</b>   |
| Flow Velocity Unit              | Unit of flow speed, default m/s.<br>Metric: m/s<br>Imperial: ft/s   | N/A  |
| Extension Mode                  | Set Low Flow Extension, Maximum Measurement Flow Range: 0.15~10m/s.   | Set Low Flow Extension, Maximum Measurement Flow Range: 0.3~10m/s.   |
| Pulse Width                     | 0.5 ms (millisecond), 1ms, or 10ms. The default is 0.5ms.   | 1ms, or 10ms. The default is 1ms.  |
| RS485 Baud                      | The Modbus communication baud rate can be set when the device is turned off to <b>9600, 19200, 38400, or 57600.</b> The default setting is off.             | The Modbus communication baud rate can be set when the device is turned off to <b>9600, 19200, or 38400.</b> The default setting is off. |
| Iout Def. (Iout Definition)     | 4 options of the output data of Analog signal: off, flowrate, velocity and total.   | The output data of the analog signal is the instantaneous flow rate.   |
| Iout Range                      | 2 options of analog signals: <b>4-20mA, 0-20mA</b><br>Default is 4-20mA.  | Only one analog signals: <b>4-20mA</b>   |



**LORRIC**

**United Benefit Corp**


8F, No.3, Lane 83, Sec. 1, Guangfu Rd.  
Sanhong Dist. New Taipei City

TEL: +886-2-8511-2135  
FAX: +886-2-8511-2097  
E-mail: sales@lorric.com

[www.lorric.com](http://www.lorric.com)



FP-AS310 Website



FP-AS310  
Instruction Manual